


Isolation Valves

TeleflexGFI solenoid-operated isolation valves provide high and low pressure fuel shut-off capability in the most demanding CNG & Hydrogen applications.

- Simple, economical design.
- Suitable for both on and off-road applications.
- Fast-operating solenoid and superior-sealing characteristics enhance system reliability.
- Available in both 12 and 24 volt solenoid models.

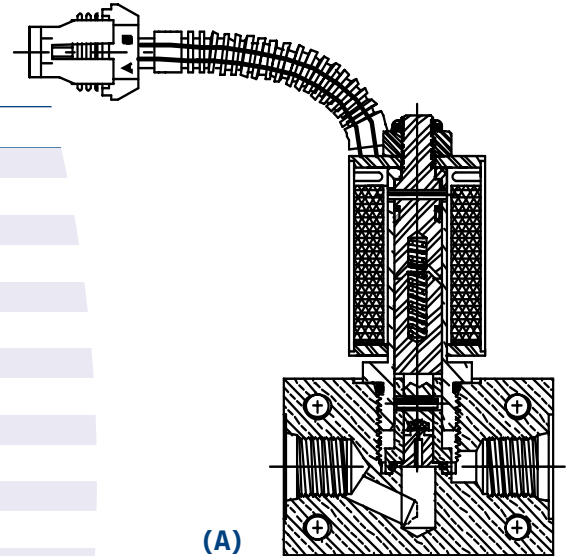

Isolation Valves

Inlet & Outlet Connection	SAE threaded or SAE tube form
Operating Temperature	-40°F to 250°F (-40°C to 121°C)
Flow Rate	CV 1.25 nominal
Voltage	12V or 24V DC continuous duty
Material	Nickel plated brass or anodized aluminum
Operating Pressure	(A) High pressure: 3,600 psi maximum (B) Low pressure: 250 psi maximum
Response Time (nominal)	750 milliseconds